


Product Data Sheet

P2663T Cantilever Arm

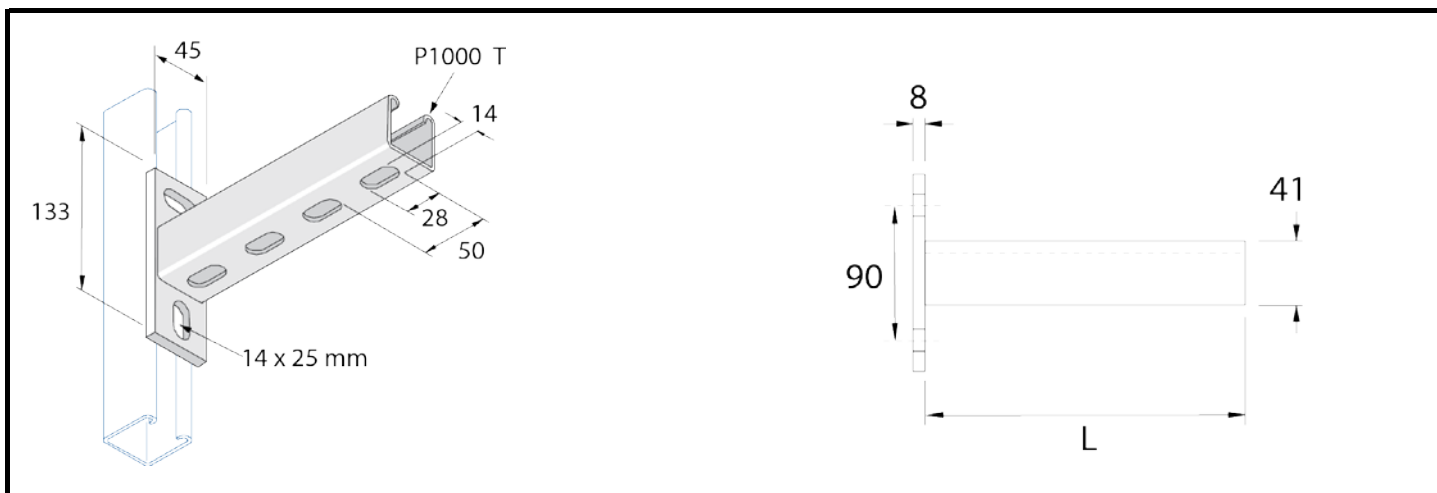

Part No.	Finish			L (mm)	Loading Diagrams				
	HG	SS	ZP		Weight (kg)	Diagram 1	Diagram 2	Diagram 3	Diagram 4
P2663T/150	•	•	•	0.75	150	6.12 kN	3.06 kN	3.06 kN	2.04 kN
P2663T/300	•	•	•	1.16	300	3.06 kN	1.53 kN	1.53 kN	1.02 kN
P2663T/450	•	•	•	1.57	450	2.04 kN	1.02 kN	1.02 kN	0.68 kN
P2663T/600	•	•	•	1.98	600	1.53 kN	0.76 kN	0.76 kN	0.50 kN
P2663T/750	•	•	•	2.39	750	1.22 kN	0.61 kN	0.61 kN	0.40 kN

Note:

Loading Indicated are only applicable when 2 fixings per cantilever arm are used.
Stated loadings apply to mild steel products only.

Material:

- HG Mild steel - BS EN 10149-3 grade S280 - min. yield 280 n/mm² - UTS 370 n/mm²
- DH BS EN 10025 S275JO+AR+CL1 or equivalent/better. 2mm min. thick material.
- SS Stainless Steel - Hot Rolled to B.S.EN10088-2-1.4404+1D

Finishes:

- HG Hot Dip Galvanized - to BS EN ISO 1461: to a mean coating thickness (minimum) of 55 µm.
- DH Hot Dip Galvanized - to BS EN ISO 1461: to a mean coating thickness (minimum) of 85 µm.
110 µm available upon request
- SS Stainless Steel - Grade 1.4404 (316L)